




PASSIO

*Mini-Split Air Conditioner
9,400 - 25,300 BTU/H Wall Type Model
MCW R32 Series 50Hz*

TRANE
TECHNOLOGIES

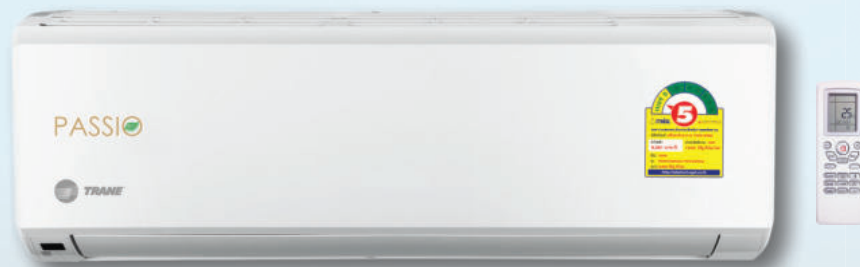

12 YEAR Compressor Warranty

2 YEAR Parts Warranty

 **Copper Condenser Coil**



Product Specifications

Model	Indoor Unit		MCWE09GB5	MCWE12GB5	MCWE15GB5	MCWE18GB5	MCWE24GB5
	Outdoor Unit		TTKE09GB5	TTKE12GB5	TTKE15GB5	TTKE18GB5	TTKE24GB5
Electrical Data	Power Supply	V/Ph/Hz	220-240/1/50	220-240/1/50	220-240/1/50	220-240/1/50	220-240/1/50
Performance Data	Capacity	Btu/h	9,400	12,700	15,200	18,300	25,300
	Airflow	cfm	300	400	500	600	800
	SEER EGAT#5 Y2019		13.00	12.88	12.85	12.85	12.90
	Room Size	sq.m.	9-12	13-18	19-23	24-28	29-35
Indoor Unit							
Fan Motor	RLA	A	0.20	0.24	0.32	0.32	0.32
Cross Flow Fan	Quantity		1	1	1	1	1
Control Type	Wireless Remote Control	Standard	•	•	•	•	•
Features	Activated Carbon Filter	Standard	•	•	•	•	•
	Auto Restart	Standard	•	•	•	•	•
	3-minute Timer Delay	Standard	•	•	•	•	•
	Fan Speed		3 + Auto	3 + Auto	3 + Auto	3 + Auto	3 + Auto
	Temperature Setting	°C	16-30	16-30	16-30	16-30	16-30
	Turbo Mode		•	•	•	•	•
	Blow Function		•	•	•	•	•
	I Feel Function		•	•	•	•	•
Dimensions	H x W x D	mm	275x790x200	289x845x209	300x970x224	300x970x224	325x1,078x246
Weight	Uncrated (Net)	kg	9	10	14	14	17
Outdoor Unit							
Compressor	Type		Rotary	Rotary	Rotary	Rotary	Rotary
	RLA	A	2.9	3.9	5.3	6.1	8.0
Fan Motor	RLA	A	0.33	0.33	0.48	0.48	0.48
Propeller Fan	Quantity		1	1	1	1	1
Dimensions	H x W x D	mm	540x712x257	540x763x257	596x818x303	596x818x303	646x841x334
Weight	Uncrated (Net)	kg	26	30	42	42	50
Piping Connection Type	Shut-off Valve Flare Connection						
Connection Pipe Size	Liquid	in	1/4	1/4	1/4	1/4	1/4
	Suction	in	3/8	1/2	1/2	1/2	5/8
Refrigerant	R32						
TIS 2134-2553 Mark							

- Remarks: 1. Test conditions under ARI standard at 80° FDB/67° FWB (Indoor) and 95° FDB (Outdoor)
 2. Dimensions of the outdoor unit in the Specification table: width and depth exclude unit legs, but height includes unit legs.
 3. Certified with TIS 2134-2553 by the Thai Industrial Standards Institute (TISI).
 4. Every model features a 24-Hour Programmable Timer, Dry Mode, Sleep Mode and Auto Sweep.
 5. The room size is defined according to the conditions of the test and only applied with rooms that have a general usage of air conditioners e.g. bedrooms.
 6. Product design and specification are subjected to change without notice.



The valve cover set are available in capacities of 9,400 to 25,300 BTU.h.



Trane – by Trane Technologies (NYSE: TT), a global climate innovator – creates comfortable, energy efficient indoor environments through a broad portfolio of heating, ventilating and air conditioning systems and controls, services, parts and supply. For more information, please visit tranethailand.com.

All trademarks referenced in this document are the trademarks of their respective owners.

Trane (Thailand)

1126/2, 30th-31st Fl., Vanit Building 2, New Petchburi Road, Makkasan, Ratchtheevee, Bangkok, 10400

0-2761-1111



@tranethailand

FB/tranethailand

www.tranethailand.com